


FLOORS, INTERIOR

Sound Rated

Wood Subfloor

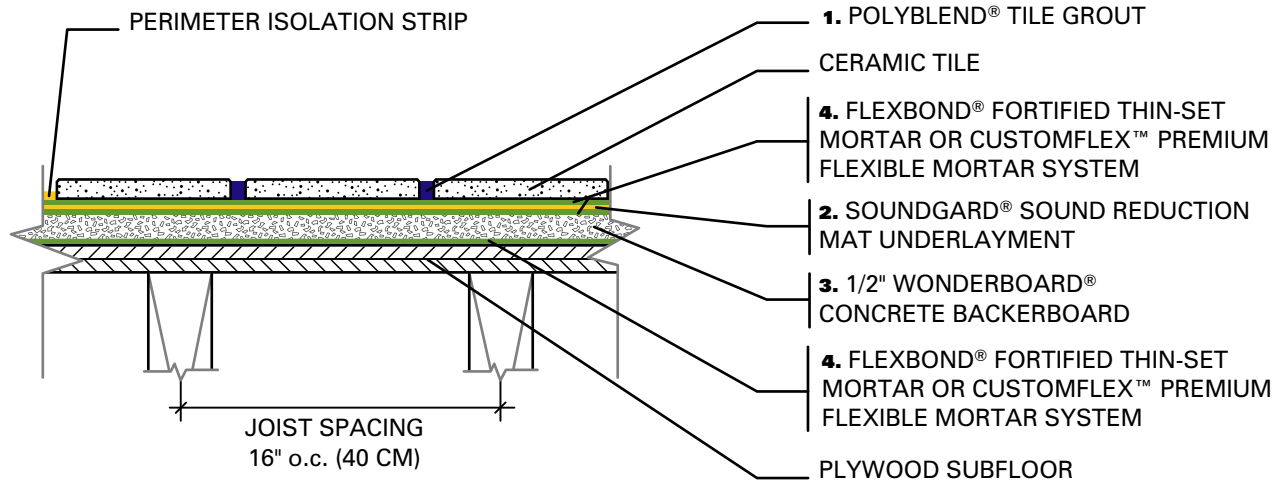

1. Grout Options:

- Polyblend® Sanded Tile Grout
- Polyblend® Non-Sanded Tile Grout

2. Sound Reduction Underlayment Options:

- SoundGard® Sound Reduction Mat Underlayment (6 mm - Rating = 59db 11c)
- SoundGard® Sound Reduction Mat Underlayment (2.5 mm - Rating = 56db 11c)

3. Cementitious Backer Unit Options:

- 1/2" WonderBoard® Concrete Backerboard

4. Latex Portland Cement Mortar Options:

- MegaFlex™ Ultimate Thin-Set Mortar
- FlexBond® Fortified Thin-Set Mortar
- CustomFlex™ Premium Flexible Mortar System – MasterBlend™ Standard Thin-Set Mortar mixed with CustomFlex™ Ultra-Strength Thin-Set Additive
- Marble & Granite Fortified Premium Mortar

These drawings have been taken from Tile Council of America's (TCA) Handbook for Ceramic Tile Installation. For your convenience, Custom Building Products options are substituted for TCA's generic product descriptions. Please refer to the Handbook for complete information.



CUSTOM
BUILDING PRODUCTS